



Jet-Air
Cool, Warm & Collected



SERIES **AL** Floor Standing



Auto Restart



Wide Voltage Range



Quick Cooling /Heating

Proudly distributed by

JASA
Smart Home



AL Floor Standing


Technical Specifications



| Model | | | JASA-FI-H24A4/AL | JASA-FI-H36A4/AL | JASA-FI-H60A5/AL | JASA-FI-H96A5/AL |
|------------------|---------------------------|----------|--------------------|---------------------|---------------------|------------------|
| | | | Fixed Speed | Inverter | Fixed Speed | Inverter |
| Power Supply | | V~,Hz,Ph | 220~240,50,1 | 220~240,50,1 | 380~415,50,3 | 380~415,50,3 |
| Capacity | Cooling | W | 7500 | 10550 | 15500 | 28100 |
| | Heating | W | 8100 | 10850 | 17500 | 30000 |
| Performance | | EER/COP | 3.00/3.45 | 3.15/3.68 | 2.65/3.18 | 2.44/3.00 |
| Electric Data | Rated Cooling Power Input | W | 2500 | 3350 | 5850 | 11500 |
| | Rated Heating Power Input | W | 2350 | 2950 | 5500 | 10000 |
| | Rated Cooling Current | A | 11.40 | 15.50 | 11.35 | 19.70 |
| | Rated Heating Current | A | 10.80 | 15.00 | 11.60 | 17.10 |
| Indoor | Indoor Air Flow | m/h | 1200/1100/1000/850 | 1850/1700/1550/1400 | 1850/1700/1550/1400 | 4000 |
| | Noise Level | dB(A) | 46/44/41/37 | 52/50/48/45 | 54/52/49/47 | 63/60/57 |
| | Outline Dimension (Φ×D) | mm | 507×1770×320 | 587×1882×394 | 587×1882×394 | 1200×1850×400 |
| | Package Dimension (W×H×D) | mm | 623×1988×440 | 738×2153×545 | 738×2153×545 | 1363×2013×513 |
| | Weight Net/Gross | kg | 40.0/52.0 | 58.0/80.5 | 59.0/81.5 | 129.0/141.0 |
| Outdoor | Noise Level | dB(A) | 56 | 63 | 61 | 63 |
| | Outline Dimension (W×H×D) | mm | 955×396×700 | 1000×427×746 | 958×412×1350 | 940×460×1615 |
| | Package Dimension (W×H×D) | mm | 1029×458×750 | 1077×480×785 | 1027×443×1395 | 1038×578×1770 |
| | Weight Net/Gross | kg | 60.0/64.5 | 60.0/65.0 | 117/127 | 160/174 |
| Refrigerant Pipe | Refrigerant Type | g | R410A/1700 | R410A/2800 | R410A/3900 | R410A/8000 |
| | Gas | inch | 1/4" | 1/4" | 3/8" | 3/8" |
| | Liquid | inch | 5/8" | 5/8" | 5/8" | 7/8" |
| | Max Length | m | 30 | 30 | 40 | 50 |
| | Max Height | m | 20 | 20 | 30 | 30 |

| Indoor Dimension | | | |
|------------------|------|------|-----|
| Model | W | H | D |
| JASA-FI-H24A4/AL | 507 | 1770 | 320 |
| JASA-FI-H36A4/AL | 587 | 1882 | 394 |
| JASA-FI-H60A5/AL | 587 | 1882 | 394 |
| JASA-FI-H96A5/AL | 1200 | 1850 | 400 |

| Outdoor Dimension | | | | | | | |
|-------------------|------|-----|------|-----|-----|------|-----|
| Model | A | B | C | D | E | F | G |
| JASA-FI-H24A4/AL | 897 | 340 | 700 | 560 | 396 | 965 | 364 |
| JASA-FI-H36A4/AL | 920 | 370 | 790 | 610 | 427 | 1003 | 395 |
| JASA-FI-H60A5/AL | 1000 | 370 | 1363 | 620 | 427 | 1089 | 399 |
| JASA-FI-H96A5/AL | 940 | 460 | 1616 | 610 | 530 | - | 486 |

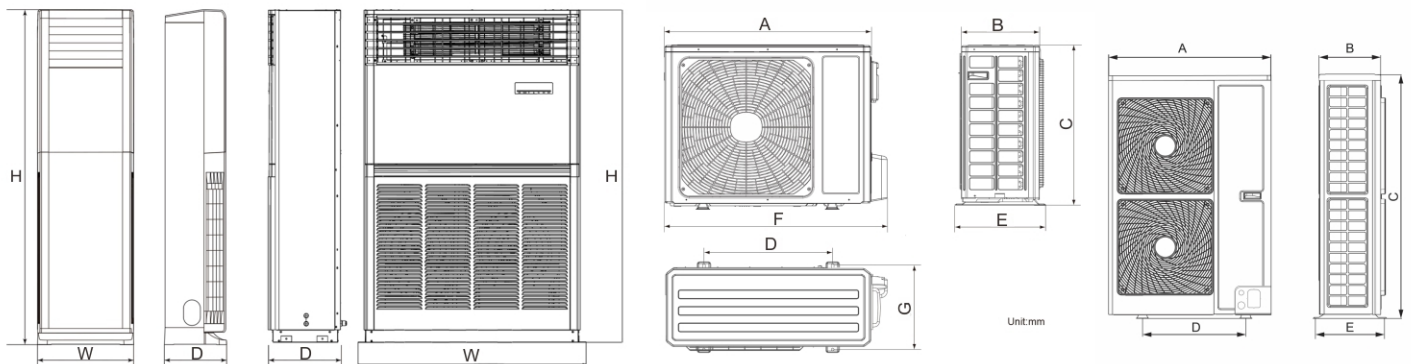

Due to JASA policy of constant improvement, specifications are subject to change without prior notice.

Remarks: Cooling capacities are based on indoor air temp. 27°C DB, 19°C WB and outdoor air temp. 35°C DB, 24°C WB. The above specifications are subject to change without prior notice for product improvement.

E.&O.E.

